



Slot Grease - Automatic Bearing Lubrication

Refillable cartridge for easy bearing relubrication.

Characteristics

Available in two sizes, 100 ml and 220 ml.

Made of transparent Lexan®, high mechanical, chemical and thermal resistance. Operating temperatures from -30°C to +132°C.

Fast and easy refilling by using the side mounted grease nipple.

Compatible with all kind of NLGI 0-1-2-3-4 greases.

Simple adjustment of the regreasing timing, variable at 1-3-6-12 months.

Different thread adapters available for the connection to the bearing housing, and the grease nipple for refilling.

Advantages

The transparent housing allows for remote consumption surveillance.

Immediate activation.

Needs no electrical or gas power source.

It can be installed indoors, outdoors, remotely, inversely, under water, in either dangerous or uncomfortable points.

It keeps lubrication constant and prevents solid matter accumulation.

It saves production stops and very expensive repairs.

Environment friendly, refillable without any disposal.

Fully recyclable.

Easy and fast mounting.

Applications


Usable in any situation where lubricated is needed:

bearings, bushings, joints, articulated joints, electric motors, compressors, pumps, valves, reduction units, cranes, mills, ovens, conveyor belts, rolling presses, archimedean screws, vibrating screens, lifts, elevators, presses, rolling mills, fans, turbines, etc.

Grease supply duration:

1-3-6-12 months, on demand, Slot Grease automatically supplies grease based on demand from machinery and depending on: spring type, temperature, grease NLGI and working conditions.

SLOTGREASE220A

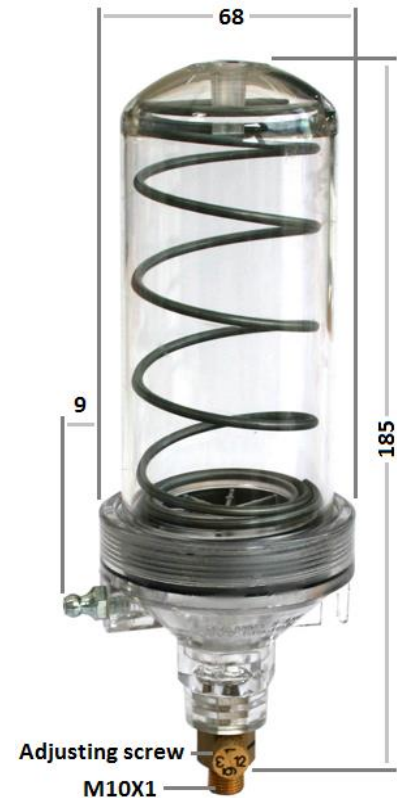

SLOTGREASE100A

