




NA.2RS Series - Needle Roller Bearings

Lip seals on both sides.

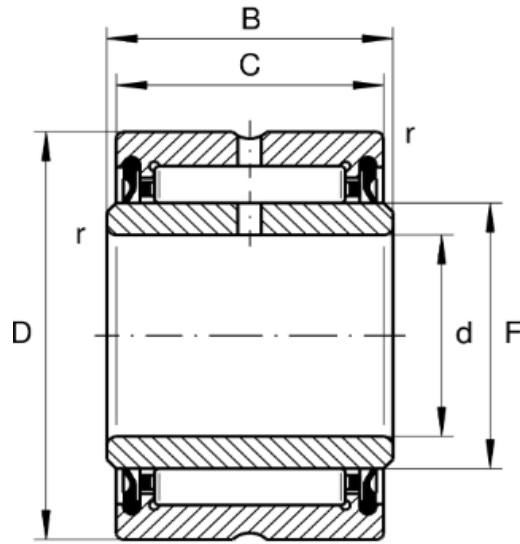

Item No.	Dimensions (mm)							Basic load ratings (kN)		Max speed (RPM)	Weight (g)
	d	D	B	C	F	r_{min}	S_{max}	Dynamic C_r	Static C_{or}	Limiting	
NA2204.2RS	20	47	18	17,8	25	1,0	-	16,1	18,0	4000	180
NA4901.2RS	12	24	14	13	16	0,3	0,5	8,1	9,7	11000	28
NA4902.2RS	15	28	14	13	20	0,3	0,5	9,1	12,0	9500	37
NA4903.2RS	17	30	14	13	22	0,3	0,5	9,5	12,9	9000	40
NA4904.2RS	20	37	18	17	25	0,3	0,5	19,4	22,4	7500	80
NA4905.2RS	25	42	18	17	30	0,3	0,5	21,6	27,5	6300	90
NA4906.2RS	30	47	18	17	35	0,3	0,5	23,3	32,0	5600	100
NA4907.2RS	35	55	21	20	42	0,6	0,5	27,0	43,0	4800	180
NA4908.2RS	40	62	23	22	48	0,6	0,5	36,9	58,5	4000	250
NA4909.2RS	45	68	23	22	52	0,6	0,5	39,1	64,0	3800	290
NA6909.2RS	40	68	40	40	52	0,6	-	54,4	103,2	2800	500
NA6910.2RS	50	72	40	40	58	0,6	-	57,8	116,0	2800	520