




## NA 49.. Series - Needle Roller Bearings

Single row, with inner ring, outer ring with 2 bords.

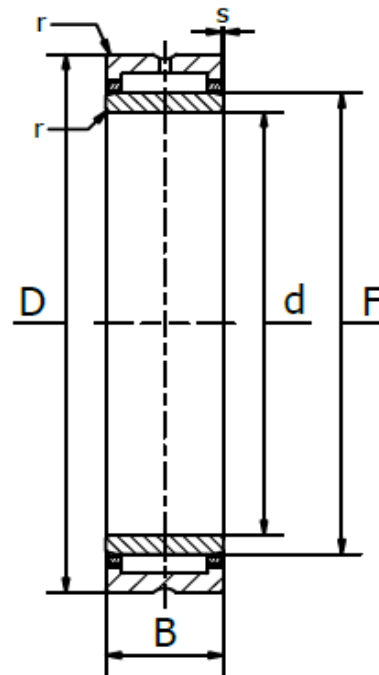

Item No.	Dimensions (mm)						Basic Load Ratings (kN)		Max. Speed (RPM)		Weight (g)
	d	D	B	F	r <sub>min</sub>	S <sub>max</sub>	Dynamic C <sub>r</sub>	Static C <sub>0r</sub>	Reference	Limiting	
NA4901	12	24	13	16	0,3	0,5	9,9	12,2	22000	26000	26
NA4902	15	28	13	20	0,3	0,5	11,2	15,3	19000	22000	34
NA4903	17	30	13	22	0,3	0,5	11,4	16,3	18000	20000	38
NA4904	20	37	17	25	0,3	0,8	21,6	28,0	15000	17000	75
NA4905	25	42	17	30	0,3	0,8	24,6	34,5	13000	15000	88
NA4906	30	47	17	35	0,3	0,8	26,0	39,0	11000	13000	100
NA4907	35	55	20	42	0,6	0,8	31,9	54,0	9500	11000	170
NA4908	40	62	22	48	0,6	1,0	42,9	71,0	8000	9500	230
NA4909	45	68	22	52	0,6	1,0	45,7	78,0	7500	8500	270
NA4910	50	72	22	58	0,6	1,0	47,3	85,0	7000	8000	270
NA4911	55	80	25	63	1,0	1,5	57,2	106,0	6300	7000	390
NA4912	60	85	25	68	1,0	1,5	60,5	114,0	6000	67000	430
NA4913	65	90	25	71	1,0	1,5	61,6	120,0	5600	6300	460
NA4914	70	100	30	80	1,0	1,5	84,2	163,0	5000	5600	730
NA4915	75	105	30	85	1,0	1,5	84,2	170,0	4800	5300	780
NA4916	80	110	30	90	1,0	1,5	88,0	183,0	4500	5000	880
NA4917	85	120	35	100	1,1	1,0	108,0	250,0	4000	45000	1250
NA4918	90	125	35	105	1,1	1,0	112,0	265,0	3800	4300	1310
Na4919	95	130	35	110	1,1	1,0	114,0	270,0	3600	4000	1370
NA4920	100	140	40	115	1,1	2,0	125,0	280,0	3400	4000	1900
NA4922	110	150	40	125	1,1	2,0	130,0	300,0	3200	3600	2070
NA4924	120	165	45	135	1,1	2,0	176,0	405,0	3000	3400	2860