




NA 69.. Series - Needle Roller Bearings

Single row, with inner ring, outer ring with 2 borders.

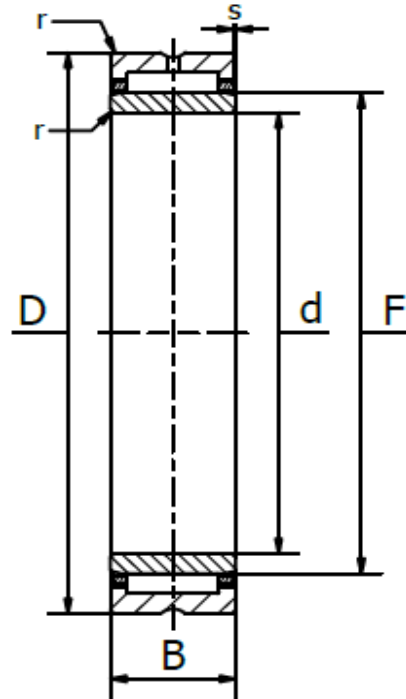

Item No.	Dimensions (mm)						Basic Load Ratings (kN)		Max. Speed (RPM)		Weight (g)
	d	D	B	F	r _{min}	S _{max}	Dynamic C _r	Static C _{0r}	Reference	Limiting	
NA6905	25	42	30	30	0,3	1,0	38,0	62,0	13000	15000	160
NA6906	30	47	30	35	0,3	1,0	42,9	75,0	11000	13000	190
NA6907	35	55	36	42	0,6	0,5	48,4	93,0	9500	11000	310
NA6908	40	62	40	48	0,6	0,5	67,1	125,0	8000	9500	430
NA6909	45	68	40	52	0,6	0,5	70,4	137,0	7500	8500	500
NA6910	50	72	40	58	0,6	0,5	73,7	150,0	7000	8000	520
NA6911	55	80	45	63	1,0	1,5	89,7	190,0	6300	7000	780
NA6912	60	85	45	68	1,0	1,5	93,5	204,0	6000	6700	810
NA6913	65	90	45	72	1,0	1,5	95,2	212,0	5600	6300	830
NA6914	70	100	54	80	1,0	1,0	128,0	285,0	5000	5600	1340
NA6915	75	105	54	85	1,0	1,0	130,0	290,0	4800	5300	1410
NA6916	80	110	54	90	1,0	1,0	134,0	315,0	4500	5000	1520
NA6917	85	120	63	100	1,1	1,0	165,0	425,0	4000	4500	2200
NA6918	90	125	63	105	1,1	1,0	172,0	450,0	3800	4300	2310
NA6919	95	130	63	110	1,1	1,0	172,0	465,0	3600	4000	2500
NA6922	22	39	30	28	0,3	0,5	36,9	57,0	14000	15000	150
NA6928	28	45	30	32	0,3	1,0	39,6	65,5	12000	14000	180