


## AH 2200 Series - Withdrawal Sleeves

Main dimensions to DIN 5416, taper 1:12, use with shaft tolerances h7, h8 and h9. Prefix AOH = Prepared for oil injection, suffix G = different thread.

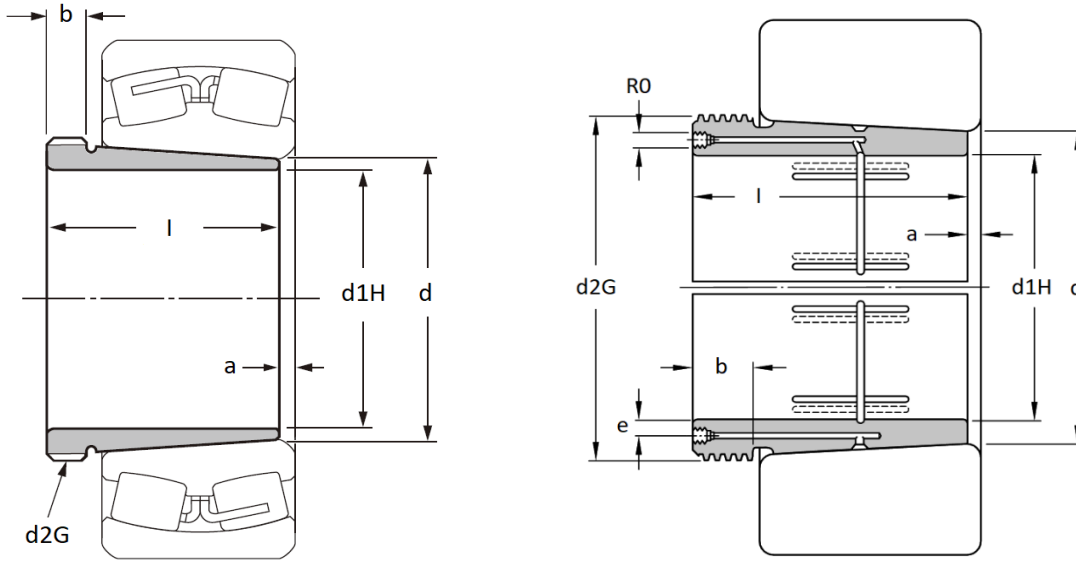

Part No.	Dimensions (mm)								Weight (kg)
	d1H mm	l	a	b	d	d2G	e	R0	
AH 2236	170	105	5	17	180	M200x3	-	-	3,76
AH 2236 G	170	105	5	17	180	M190x3	-	-	3,35
AOH 2236 G	170	105	5	17	180	M190x3	4,5	M6	3,28
AOH 2236	170	105	5	17	180	M200x3	4,5	M6	3,68
AOH 2238	180	112	5	18	190	Tr210x4	4,5	M6	4,19
AOH 2238 G	180	112	5	18	190	M200x3	4,5	M6	3,75
AH 2238 G	180	112	5	18	190	M200x3	-	-	3,83
AH 2238	180	112	5	18	190	Tr210x4	-	-	4,28
AH 2240	190	118	5	19	200	Tr220x4	-	-	4,8
AOH 2240	190	118	5	19	200	Tr220x4	4,5	M6	4,7
AOH 2244	200	130	6	20	220	Tr240x4	8,5	G1/8	8,99
AH 2244	200	130	6	20	220	Tr240x4	-	-	9,17
AH 2248	220	144	6	21	240	Tr260x4	-	-	11,3
AOH 2248	220	144	6	21	240	Tr260x4	8,5	G1/8	11
AOH 2252	240	155	6	23	260	Tr290x4	8,5	G1/8	13,8
AOH 2252 G	240	155	6	23	260	Tr280x4	8,5	G1/8	13,1
AH 2252 G	240	155	6	23	260	Tr280x4	-	-	13,3
AH 2252	240	155	6	23	260	Tr290x4	-	-	14,1
AH 2256	260	155	8	24	280	Tr310x5	-	-	15,3
AH 2256 G	260	155	8	24	280	Tr300x4	-	-	14,4
AOH 2256 G	260	155	8	24	280	Tr300x4	8,5	G1/8	14,1
AOH 2256	260	155	8	24	280	Tr310x5	8,5	G1/8	15
AOH 2260	280	170	8	26	300	Tr330x5	8,5	G1/8	17,9
AOH 2260 G	280	170	8	26	300	Tr320x5	8,5	G1/8	16,9
AH 2260 G	280	170	8	26	300	Tr320x5	-	-	17,2
AH 2260	280	170	8	26	300	Tr330x5	-	-	18,3
AOH 2264 G	300	180	10	27	320	Tr340x5	8,5	G1/8	19,6
AOH 2264	300	180	10	27	320	Tr350x5	8,5	G1/8	20,6