

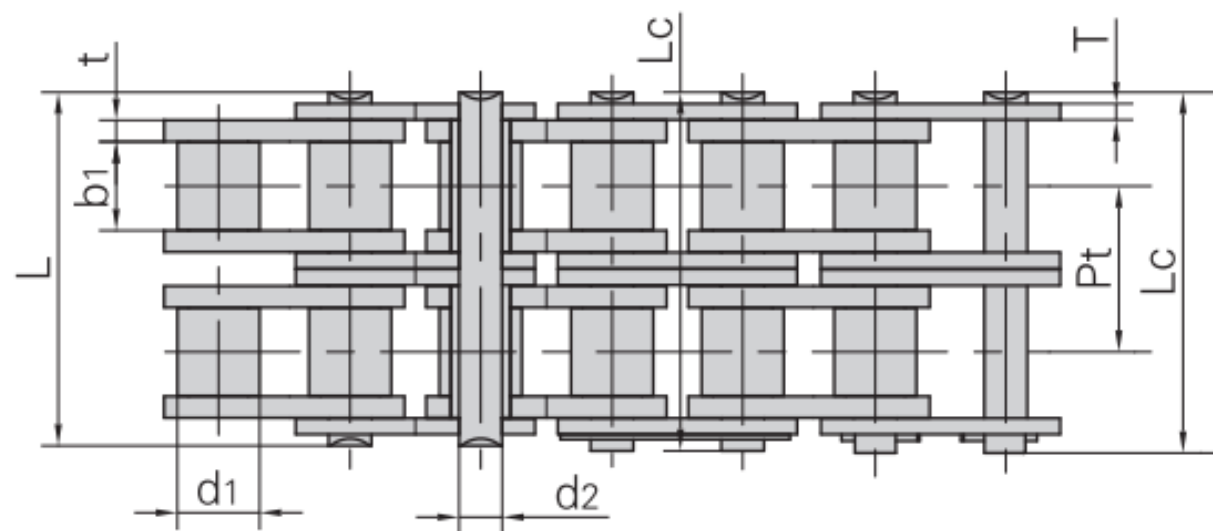


DIN/ISO Chain No.	Pitch (mm)	Roller Diameter (mm)	Width between inner plates (mm)	Pin Diameter (mm)	Pin Length (mm)		Inner plate depth (mm)	Plate thickness (mm)	Transverse pitch (mm)	Ultimate tensile strength Q <sub>min</sub> (kN/LB)	Average tensile strength Q <sub>0</sub> (kN)	Weight pr. meter q (kg/m)
	P	d <sub>1max</sub>	b <sub>1min</sub>	d <sub>2max</sub>	L <sub>max</sub>	L <sub>cmax</sub>	h <sub>2max</sub>	t/T <sub>max</sub>	Pt			
<b>08 B-1 GL</b>	12,700	8,51	7,75	4,45	16,7	18,2	11,8	1,60	-	18,0/4091	19,5	0,80
<b>10 B-1 GL</b>	15,875	10,16	9,65	5,08	19,5	20,9	14,7	1,70	-	22,4/5091	27,9	1,06
<b>12 B-1 GL</b>	19,050	12,07	11,68	5,72	22,5	25,2	16,0	1,85	-	29,0/6591	32,2	1,32
<b>16 B-1 GL</b>	25,400	15,88	17,02	8,28	36,1	39,1	21,0/24,0	4,15/3,1	-	60,0/13636	72,8	3,08/3,49
<b>20 B-1 GL</b>	31,750	19,05	19,56	10,19	41,3	45,0	26,4	4,5/3,5	-	95,0/21591	106,7	4,16
<b>24 B-1 GL</b>	38,100	25,40	25,40	14,63	53,4	57,8	33,2	6,0/4,8	-	160,0/36364	178,0	7,47
<b>28 B-1 GL</b>	44,450	27,94	30,99	15,90	65,1	69,5	36,7	7,5/6,0	-	200,0/45455	222,0	9,90
<b>32 B-1 GL</b>	50,800	29,10	30,99	17,81	66,0	71,0	42,0	7,0/6,0	-	250,0/56818	277,5	10,45

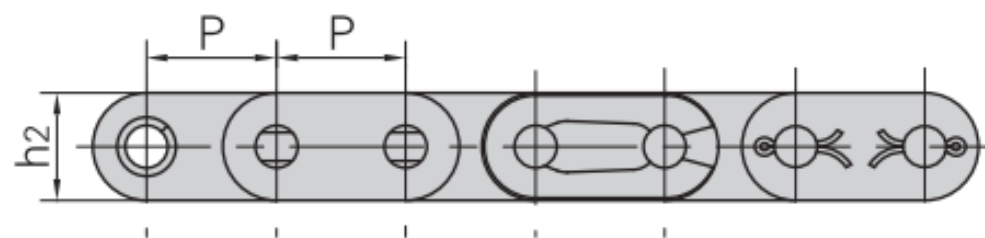

DIN/ISO Chain No.	Pitch (mm)	Roller Diameter (mm)	Width between inner plates (mm)	Pin Diameter (mm)	Pin Length (mm)		Inner plate depth (mm)	Plate thickness (mm)	Transverse pitch (mm)	Ultimate tensile strength Q <sub>min</sub>	Average tensile strength Q <sub>0</sub>	Weight pr. meter q
	P	d <sub>1max</sub>	b <sub>1min</sub>	d <sub>2max</sub>	L <sub>max</sub>	LC <sub>max</sub>	h <sub>2max</sub>	t/T <sub>max</sub>	Pt	kN/LB	kN	kg/m
<b>08 B-2 GL</b>	12,700	8,51	7,75	4,45	31,2	32,2	11,8	1,60	13,92	32,0/7273	38,7	1,45
<b>10 B-2 GL</b>	15,875	10,16	9,65	5,08	36,1	37,5	14,7	1,70	16,56	44,5/10114	57,8	2,00
<b>12 B-2 GL</b>	19,050	12,07	11,68	5,72	42,0	44,7	16,0	1,85	19,46	57,8/13136	66,0	2,62
<b>16 B-2 GL</b>	25,400	15,88	17,02	8,28	68,0	71,0	21,0/24,0	4,15/3,1	31,88	106,0/24091	133,0	6,10/6,92
<b>20 B-2 GL</b>	31,750	19,05	19,56	10,19	77,8	81,5	26,4	4,5/3,5	36,45	170,0/38636	211,2	8,23
<b>24 B-2 GL</b>	38,100	25,40	25,40	14,63	101,7	106,2	33,2	6,0/4,8	48,36	280,0/63636	319,2	14,77
<b>28 B-2 GL</b>	44,450	27,94	30,99	15,90	124,6	129,1	36,7	7,5/6,0	59,56	360,0/81818	406,8	19,82
<b>32 B-2 GL</b>	50,800	29,10	30,99	17,81	124,6	129,6	42,0	7,0/6,0	58,55	450,0/102273	508,5	20,94

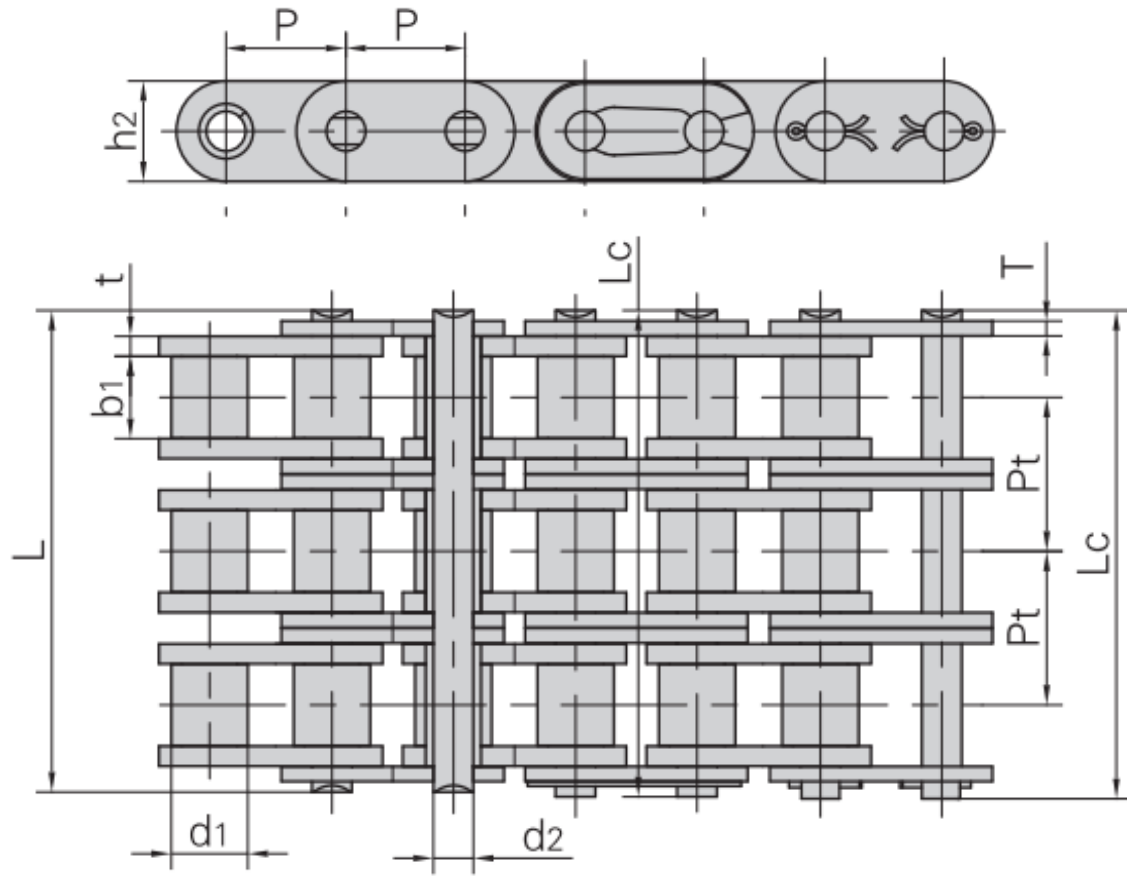

DIN/ISO Chain No.	Pitch (mm)	Roller Diameter (mm)	Width between inner plates (mm)	Pin Diameter (mm)	Pin Length (mm)		Inner plate depth (mm)	Plate thickness (mm)	Transverse pitch (mm)	Ultimate tensile strength Q <sub>min</sub> (kN/LB)	Average tensile strength Q <sub>0</sub> (kN)	Weight pr. meter q (kg/m)
	P	d <sub>1max</sub>	b <sub>1min</sub>	d <sub>2max</sub>	L <sub>max</sub>	L <sub>cmax</sub>	h <sub>2max</sub>	t/T <sub>max</sub>	Pt			
08 B-3 GL	12,700	8,51	7,75	4,45	45,1	46,1	11,8	1,60	13,92	47,5/10795	57,8	2,10
10 B-3 GL	15,875	10,16	9,65	5,08	52,7	54,1	14,7	1,70	16,56	66,7/15159	84,5	2,87
12 B-3 GL	19,050	12,07	11,68	5,72	61,5	64,2	16,0	1,85	19,46	86,7/19705	101,8	3,89
16 B-3 GL	25,400	15,88	17,02	8,28	99,8	102,9	21,0/24,0	4,15/3,1	31,88	160,0/36364	203,7	9,12/10,34
20 B-3 GL	31,750	19,05	19,56	10,19	114,2	117,9	26,4	4,5/3,5	36,45	250,0/56818	290,0	11,34
24 B-3 GL	38,100	25,40	25,40	14,63	150,1	154,6	33,2	6,0/4,8	48,36	425,0/96591	493,0	22,10
28 B-3 GL	44,450	27,94	30,99	15,90	184,2	188,7	36,7	7,5/6,0	59,56	530,0/120454	609,5	29,64
32 B-3 GL	50,800	29,10	30,99	17,81	183,2	188,2	42,0	7,0/6,0	58,55	670,0/152273	770,5	31,27