



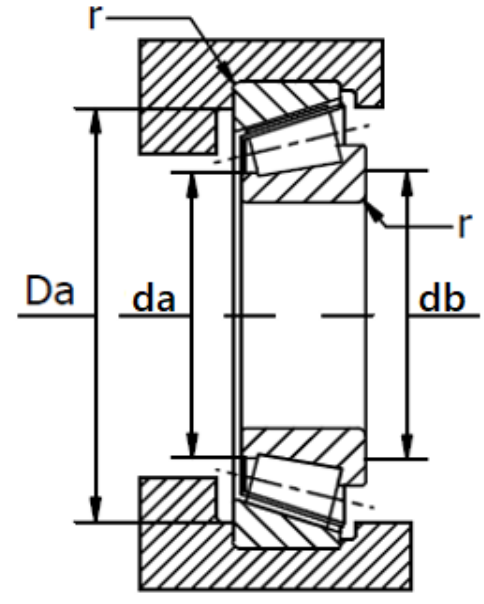

30200 Series - Tapered Roller Bearings

Main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs.

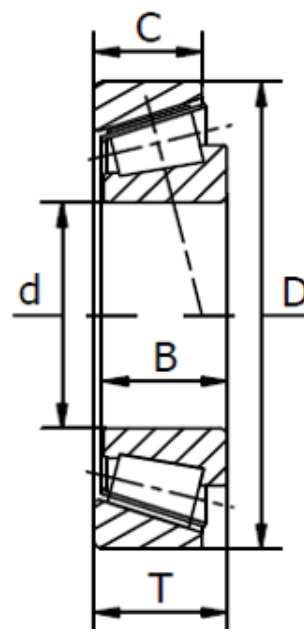

Item No.	Dimensions (mm)							Basic Load Ratings (kN)		Limiting Speed (RPM)		Weight (kg)		
	d	D	T	B	C	r	da (max)	db (min)	Da (max)	Cr	C0r		Grease	Oil
30202	15	35	11,75	11	10	0,05	20	19	29	16	14	11000	15000	0,05
30203	17	40	13,25	12	11	0,10	23	23	34	20	20	9500	13000	0,08
30204	20	47	15,25	14	12	0,10	27	26	41	28	29	8000	11000	0,13
30205	25	52	16,25	15	13	0,10	31	31	46	32	35	7100	10000	0,16
30206	30	62	17,25	16	14	0,10	37	36	56	43	48	6000	8000	0,23
30207	35	72	18,25	17	15	0,15	44	42	65	54	60	5300	7100	0,34
30208	40	80	19,75	18	16	0,15	49	47	73	64	70	4800	6300	0,44
30209	45	85	20,75	19	16	0,15	54	52	78	69	80	4300	6000	0,49
30210	50	90	21,75	20	17	0,15	58	57	83	76	92	4000	5300	0,55
30211	55	100	22,75	21	18	0,15	64	64	91	94	113	3600	5000	0,73
30212	60	110	23,75	22	19	0,15	70	69	101	104	123	3400	4500	0,92
30213	65	120	24,75	23	20	0,15	77	74	111	122	151	3000	4000	1,17
30214	70	125	26,25	24	21	0,15	81	79	116	132	163	2800	4000	1,29
30215	75	130	27,25	25	22	0,15	86	84	121	143	182	2800	3800	1,42
30216	80	140	28,25	26	22	0,20	91	90	130	157	195	2600	3400	1,68
30217	85	150	30,50	28	24	0,20	97	95	140	184	233	2400	3200	2,10
30218	90	160	32,50	30	26	0,20	103	100	150	201	256	2200	3000	2,58
30219	95	170	34,50	32	27	0,20	110	107	158	223	286	2200	2800	3,11
30220	100	180	37,00	34	29	0,20	116	112	168	255	330	2000	2600	3,75
30221	105	190	39,00	36	30	0,20	122	117	178	280	365	1900	2600	4,47
30222	110	200	41,00	38	32	0,20	129	122	188	315	420	1800	2400	5,24
30224	120	215	43,50	40	34	0,20	140	132	203	335	449	1600	2200	6,23
30226	130	230	43,75	40	34	0,25	152	144	216	375	507	1500	2000	7,20
30228	140	250	45,75	42	36	0,25	163	154	236	390	516	1400	1900	8,67
30230	150	270	49,00	45	38	0,25	175	164	256	485	570	1300	1700	10,6
30232	160	290	52,00	48	40	0,25	189	174	276	530	610	1200	1600	13,0
30234	170	310	57,00	52	43	0,30	203	188	292	630	690	1100	1500	16,0
30236	180	320	57,00	52	43	0,30	211	198	302	650	694	1100	1400	16,5
30238	190	340	60,00	55	46	0,30	224	207	322	715	792	1000	1300	19,9
30240	200	360	64,00	58	48	0,30	237	217	342	795	890	900	1300	23,6
30244	220	400	72,00	68	54	0,30	255	237	382	810	1153	850	1100	33,3
30248	240	440	79,00	72	60	0,30	285	257	420	992	1402	750	1000	44,9
30252	260	480	89,00	80	67	0,41	310	280	457	1193	1700	670	900	60,2
30256	280	500	89,00	80	67	0,41	325	338	477	1242	1900	630	850	65,8
30260	300	540	96,00	85	71	0,41	340	352	517	1442	2100	600	800	80,0
30264	320	580	104,00	92	75	0,41	380	340	556	1642	2421	530	750	98,5