




## NA.2RS Series - Needle Roller Bearings

lip seals on both sides.

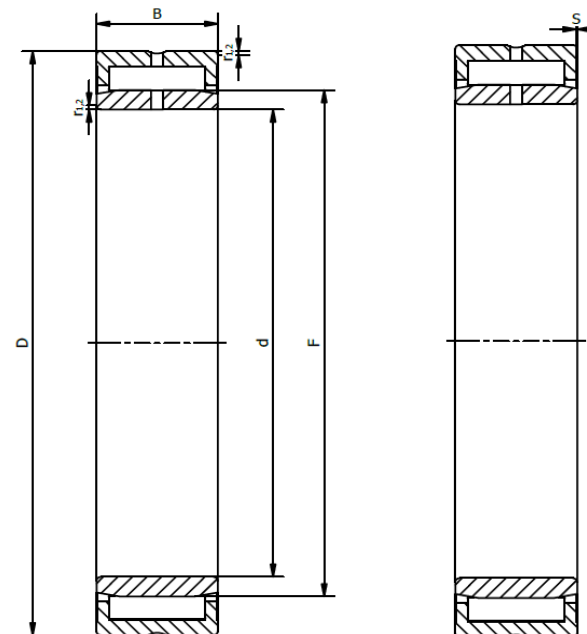

Item No.	Dimensions (mm)							Weight (g)	Basic load ratings (kN)		Max speed (RPM) Limiting
	d	D	B	C	F	r1,2	s		Dynamic Cr	Static Cor	
NA2204.2RS	20	47	18	17,8	25	min. 1	x	180	16,1	18	4000
NA4901.2RS	12	24	14	13	16	min. 0,3	max. 0,5	28	8,09	9,65	11000
NA4902.2RS	15	28	14	13	20	min. 0,3	max. 0,5	37	9,13	12	9500
NA4903.2RS	17	30	14	13	22	min. 0,3	max. 0,5	40	9,52	12,9	9000
NA4904.2RS	20	37	18	17	25	min. 0,3	max. 0,5	80	19,4	22,4	7500
NA4905.2RS	25	42	18	17	30	min. 0,3	max. 0,5	90	21,6	27,5	6300
NA4906.2RS	30	47	18	17	35	min. 0,3	max. 0,5	100	23,3	32	5600
NA4907.2RS	35	55	21	20	42	min. 0,6	max. 0,5	180	27	43	4800
NA4908.2RS	40	62	23	22	48	min. 0,6	max. 0,5	250	36,9	58,5	4000
NA4909.2RS	45	68	23	22	52	min. 0,6	max. 0,5	290	39,1	64	3800
NA6909.2RS	40	68	40	40	52	min. 0,6	x	500	54,4	103,2	2800
NA6910.2RS	50	72	40	40	58	min. 0,6	x	520	57,76	116	2800