




NA 49.. Series - Needle Roller Bearings

single row, with inner ring, outer ring with 2 bords

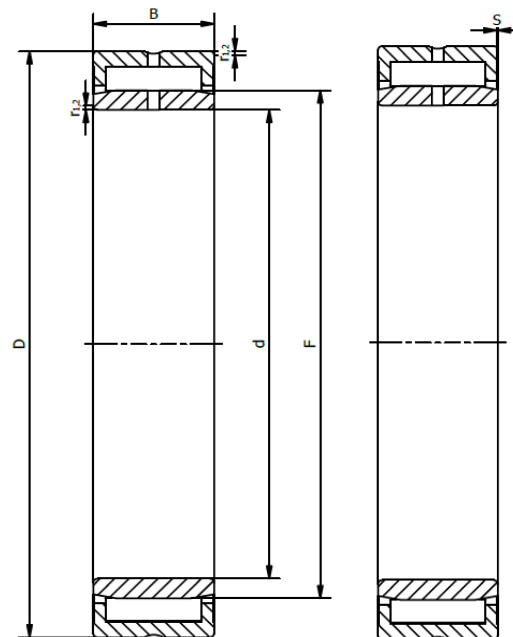


Item No.	Dimensions (mm)						Weight (g)	Basic Load Ratings (kN)		Max. Speed (RPM)	
	d	D	B	F	r _{1,2}	S		Dynamic C _r	Static C _{0r}	Reference	Limiting
NA4901	12	24	13	16	min. 0,3	max. 0,5	26	9,9	12,2	22000	26000
NA4902	15	28	13	20	min. 0,3	max. 0,5	34	11,2	15,3	19000	22000
NA4903	17	30	13	22	min. 0,3	max. 0,5	38	11,4	16,3	18000	20000
NA4904	20	37	17	25	min. 0,3	max. 0,8	75	21,6	28	15000	17000
NA4905	25	42	17	30	min. 0,3	max. 0,8	88	24,6	34,5	13000	15000
NA4906	30	47	17	35	min. 0,3	max. 0,8	100	26	39	11000	13000
NA4907	35	55	20	42	min. 0,6	max. 0,8	170	31,9	54	9500	11000
NA4908	40	62	22	48	min. 0,6	max. 1	230	42,9	71	8000	9500
NA4909	45	68	22	52	min. 0,6	max. 1	270	45,7	78	7500	8500
NA4910	50	72	22	58	min. 0,6	max. 1	270	47,3	85	7000	8000
NA4911	55	80	25	63	min. 1	max. 1,5	390	57,2	106	6300	7000
NA4912	60	85	25	68	min. 1	max. 1,5	430	60,5	114	6000	67000



NA 49.. Series - Needle Roller Bearings

single row, with inner ring, outer ring with 2 bords

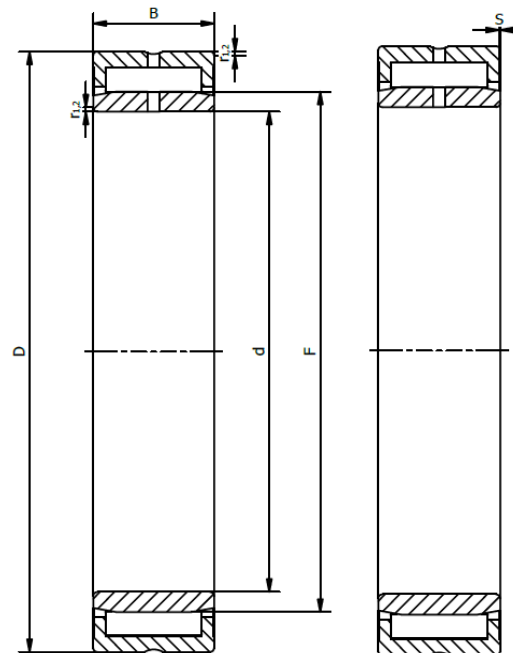

Item No.	Dimensions (mm)						Weight (g)	Basic Load Ratings (kN)		Max. Speed (RPM)	
	d	D	B	F	r _{1,2}	S		Dynamic C _r	Static C _{0r}	Reference	Limiting
NA4913	65	90	25	71	min. 1	max. 1,5	460	61,6	120	5600	6300
NA4914	70	100	30	80	min. 1	max. 1,5	730	84,2	163	5000	5600
NA4915	75	105	30	85	min. 1	max. 1,5	780	84,2	170	4800	5300
NA4916	80	110	30	90	min. 1	max. 1,5	880	88	183	4500	5000
NA4917	85	120	35	100	min. 1,1	max. 1	1250	108	250	4000	45000
NA4918	90	125	35	105	min. 1,1	max. 1	1310	112	265	3800	4300
Na4919	95	130	35	110	min. 1,1	max. 1	1370	114	270	3600	4000
NA4920	100	140	40	115	min 1,1	max. 2	1900	125	280	3400	4000
NA4922	110	150	40	125	min 1,1	max. 2	2070	130	300	3200	3600
NA4924	120	165	45	135	min 1,1	max. 2	2860	176	405	3000	3400