




## NA 69.. Series - Needle Roller Bearings

single row, with inner ring, outer ring with 2 bords

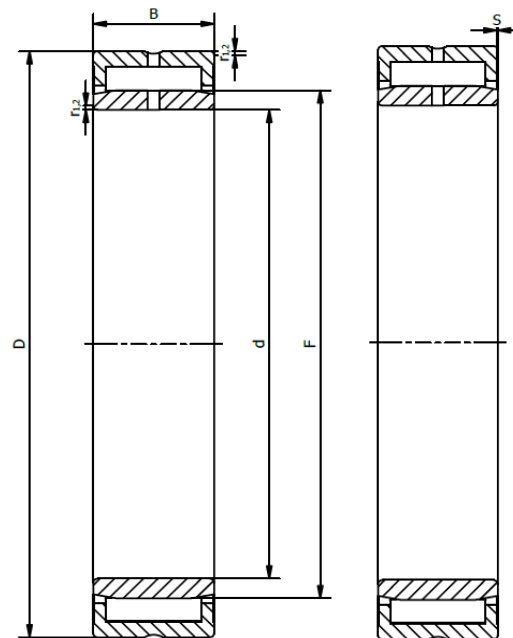


Item No.	Dimensions (mm)						Weight (g)	Basic Load Ratings (kN)		Max. Speed (RPM)	
	d	D	B	F	r <sub>1,2</sub>	S		Dynamic C <sub>r</sub>	Static C <sub>0r</sub>	Reference	Limiting
NA6905	25	42	30	30	min. 0,3	max. 1	160	38	62	13000	15000
NA6906	30	47	30	35	min. 0,3	max. 1	190	42,9	75	11000	13000
NA6907	35	55	36	42	min. 0,6	max. 0,5	310	48,4	93	9500	11000
NA6908	40	62	40	48	min. 0,6	max. 0,5	430	67,1	125	8000	9500
NA6909	45	68	40	52	min. 0,6	max. 0,5	500	70,4	137	7500	8500
NA6910	50	72	40	58	min. 0,6	max. 0,5	520	73,7	150	7000	8000
NA6911	55	80	45	63	min. 1	max. 1,5	780	89,7	190	6300	7000
NA6912	60	85	45	68	min. 1	max. 1,5	810	93,5	204	6000	6700
NA6913	65	90	45	72	min. 1	max. 1,5	830	95,2	212	5600	6300
NA6914	70	100	54	80	min. 1	max. 1	1340	128	285	5000	5600
NA6915	75	105	54	85	min. 1	max. 1	1410	130	290	4800	5300
NA6916	80	110	54	90	min. 1	max. 1	1520	134	315	4500	5000



## NA 69.. Series - Needle Roller Bearings

single row, with inner ring, outer ring with 2 bords

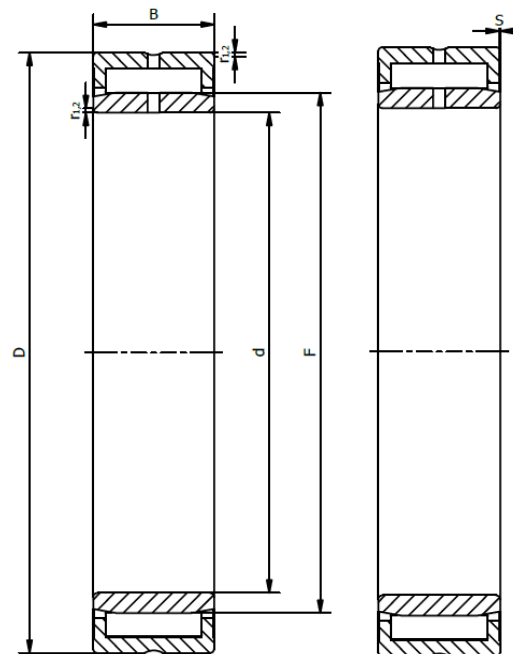

Item No.	Dimensions (mm)						Weight (g)	Basic Load Ratings (kN)		Max. Speed (RPM)	
	d	D	B	F	r <sub>1,2</sub>	S		Dynamic C <sub>r</sub>	Static C <sub>0r</sub>	Reference	Limiting
NA6917	85	120	63	100	min. 1,1	max. 1	2200	165	425	4000	4500
NA6918	90	125	63	105	min. 1,1	max. 1	2310	172	450	3800	4300
NA6919	95	130	63	110	min. 1,1	max. 1	2500	172	465	3600	4000
NA6922	22	39	30	28	min. 0,3	max. 0,5	150	36,9	57	14000	15000
NA6928	28	45	30	32	min. 0,3	max. 1	180	39,6	65,5	12000	14000