



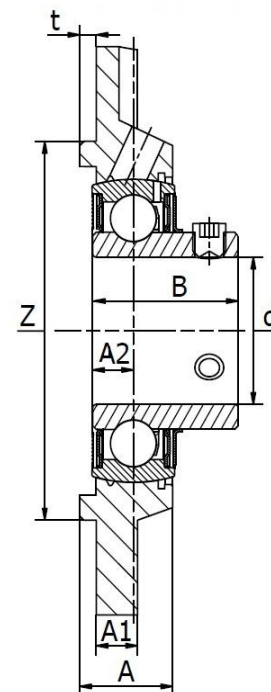

FWSN S

Four-bolt flanged housing unit, cast iron, radial insert ball bearing, location by set screws, universal regreaseable, lithium based NLGI 2/3 grease. Temperature range -30°C to +110°C

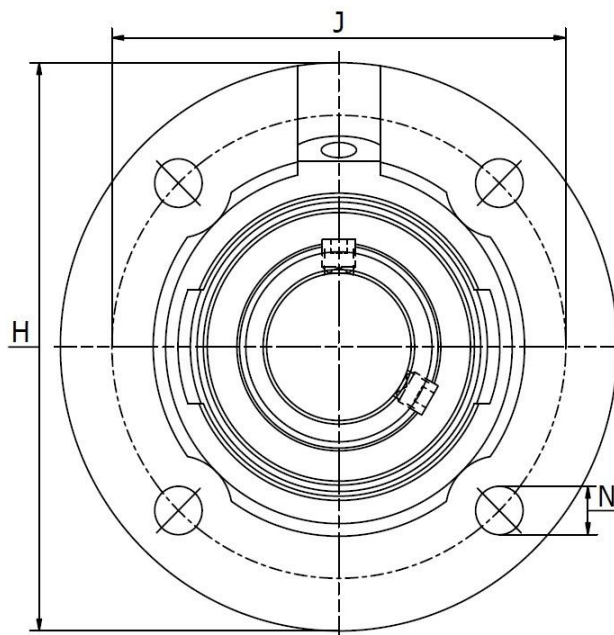

Part No.	Dimensions (mm)											Bearing No.	Weight (kg)
	d	H	B	A	A ₁	A ₂	J	N	Q	t	Z		
FWSN 25 S	25	115	27,0	22,0	9,0	7,5	92	9,0	Rp 1/8	3	75 h8	SB 205	0,74
FWSN 30 S	30	127	30,0	22,5	9,5	9,0	105	9,0	Rp 1/8	3	85 h8	SB 206	0,97
FWSN 35 S	35	135	35,0	22,5	10,0	9,5	110	11,5	Rp 1/8	4	90 h8	SB 207	1,16
FWSN 40 S	40	145	39,5	26,0	11,5	10,5	120	11,5	Rp 1/8	4	100 h8	SB 208	1,55
FWSN 45 S	45	155	41,5	26,5	12,0	11,0	130	14,0	Rp 1/8	4	105 h8	SB 209	2,06
FWSN 50 S	50	165	43,0	27,5	12,5	11,0	136	14,0	Rp 1/8	4	115 h8	SB 210	2,15
FWSN 60 S	60	195	47,0	33,0	16,0	13,0	165	14,0	Rp 1/8	4	140 h8	SB 212	3,32

[Datasheet for SB bearings](#)