




## UCFB 200 Series (American Standard)

3-bolt flanged bracket, normal duty, cast iron housing, set screw lock. Temperature range -30°C to +110°C

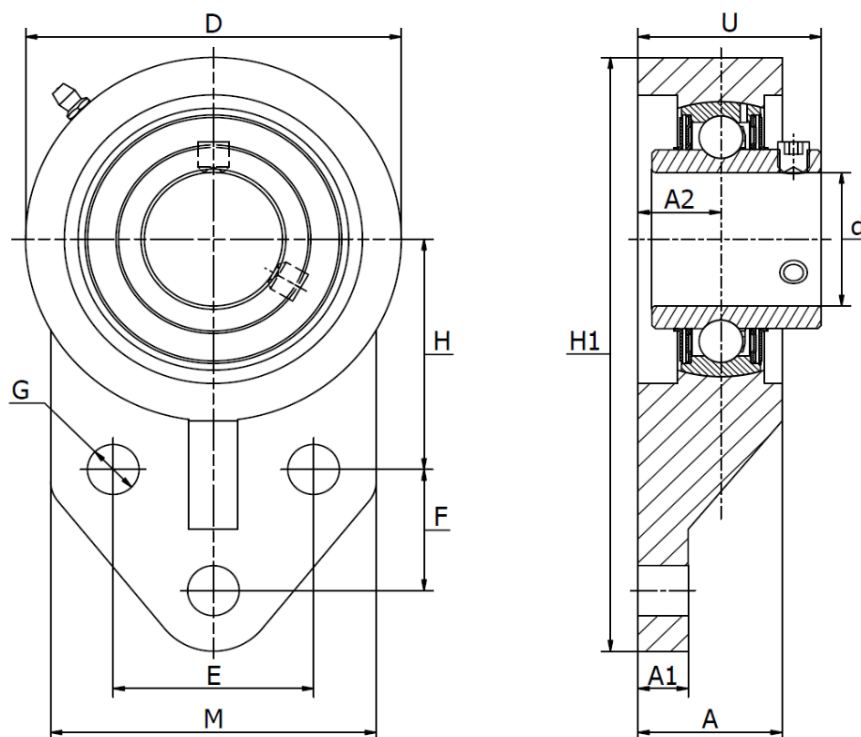

Part No.	d		Dimensions (mm)										Bearing No.	Weight (kg)
	mm	H1	A	A1	D	E	F	G	H	A2	U	M		
<b>UCFB 201</b>	12	108	25,5	8,0	64	38,1	22,2	10	43,0	16	34,3	60	UC 201	0,7
<b>UCFB 202</b>	15	108	25,5	8,0	64	38,1	22,2	10	43,0	16	34,3	60	UC 202	0,7
<b>UCFB 203</b>	17	108	25,5	8,0	64	38,1	22,2	10	43,0	16	34,3	60	UC 203	0,7
<b>UCFB 204</b>	20	108	25,5	8,0	64	38,1	22,2	10	43,0	16	34,3	60	UC 204	0,7
<b>UCFB 205</b>	25	121	29,0	9,5	70	41,3	28,6	10	46,0	17	36,8	64	UC 205	0,8
<b>UCFB 206</b>	30	137	32,0	9,5	83	47,6	31,8	10	52,4	19	41,2	70	UC 206	1,3
<b>UCFB 207</b>	35	156	37,0	13,0	95	50,8	31,8	10	60,0	21	46,4	83	UC 207	1,7
<b>UCFB 208</b>	40	164	36,0	14,0	100	50,0	41,0	12	60,0	21	51,2	78	UC 208	2,0
<b>UCFB 209</b>	45	174	34,0	18,0	106	54,0	43,0	12	65,0	21	51,2	80	UC 209	2,3
<b>UCFB 210</b>	50	191	38,0	13,0	118	70,0	41,3	12	74,6	21	53,6	102	UC 210	2,9