



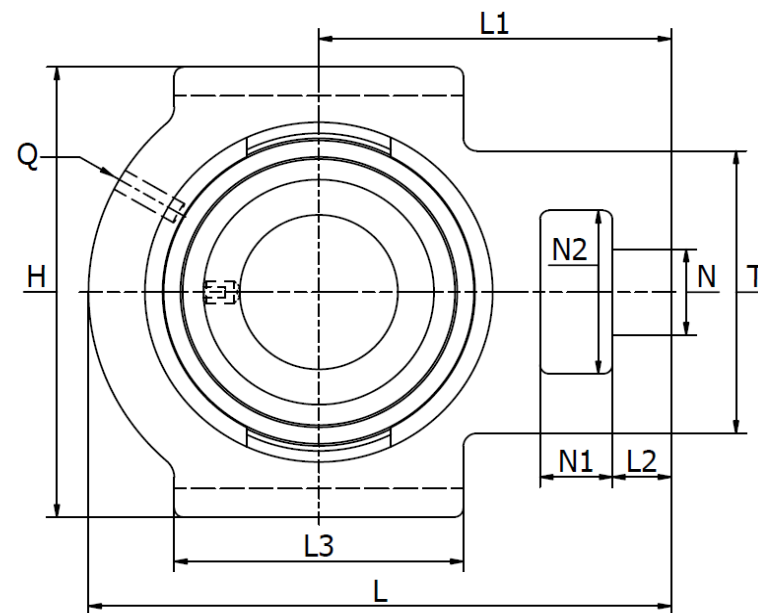

WS 200 – Take-up housing (TU .. FM / SAST / ST..EC) Eccentric locking collar, wide slot. Temperature range -30°C to +110°C

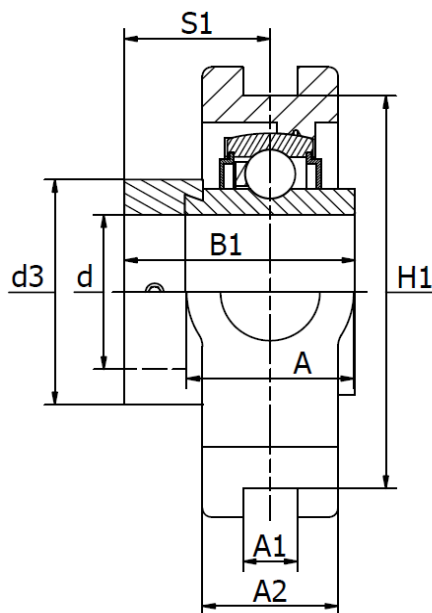

Product No.	d		Dimensions (mm)																Bearing no.	Housing no.	Weight (kg)
	mm	L	A ₂	S ₁	H	H ₁	L ₃	L ₂	L ₁	N	B ₁	N ₁	N ₂	T	A	A ₁	Q	d ₃			
WS 206	30	114	28	26,8	104	89,0	57,0	10	70,0	22	35,8	16	37,0	56	37	13,5	M6X1	44,0	SA 206	WS 206 O.L	1,6
WS 207	35	129	30	29,5	103	89,0	64,0	12	78,0	22	39,0	17	38,0	64	37	13,5	M6X1	55,0	SA 207	WS 207 O.L	2,0
WS 208	40	145	33	32,8	115	101,0	83,0	15	88,0	29	43,8	19	50,0	83	49	17,5	M6X1	60,0	SA 208	WS 208 O.L	2,7
WS 209	45	144	35	32,8	117	101,0	83,0	15	87,0	29	43,8	19	49,0	83	49	17,5	M6X1	63,0	SA 209	WS 209 O.L	2,9
WS 210	50	149	36	32,8	117	101,0	86,0	16	90,0	29	43,8	19	49,0	83	49	17,5	M6X1	69,0	SA 210	WS 210 O.L	3,2